

Date

Project

Type

Location

UHB19

LED UFO HIGH BAY LIGHT



Application	Ideal for general illumination of workshop, indoor stadium, warehouse, and other industrial applications.
Environment	Indoor. Dry, damp, and wet locations
Certification	cULus Listed, DLC, IP65 rated
Material	Die-cast aluminum body with polycarbonate lens
Dimming	0-10V Dimming
Color Temperature	4000K / 5000K
Beam Angle	90°
Input Voltage	120-347V AC, 50-60Hz
Power Factor	≥ 0.9
Wattage	150W
Lumen	145 Lm/W
CRI	80
IP Rating	65
Operating Temperature	-40°C~50°C (-40°F~122°F)
Warranty	5-Year limited warranty on LED and drivers. Estimated 50,000 hours useful life of LED.

ORDERING INFORMATION

Sample Number: UHB19-150W-5K-80-C

Model#	Wattage	CCT	CRI	Lens	Add-on Options <small>(Sold Separately)</small>
UHB19	150W		80	C	
UHB19	150W 150W	4K 4000K 5K 5000K	80 CRI >80	C Clear Polycarbonate Lens	SK Surface Mount Bracket BS Built-in Motion Sensor WG Wire Guard AR Aluminum Reflector


Date _____

Project _____


Type _____

Location _____

DIMENSIONS

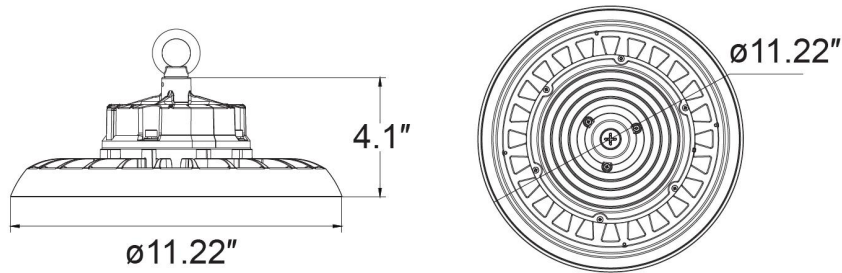

PHOTOMETRY

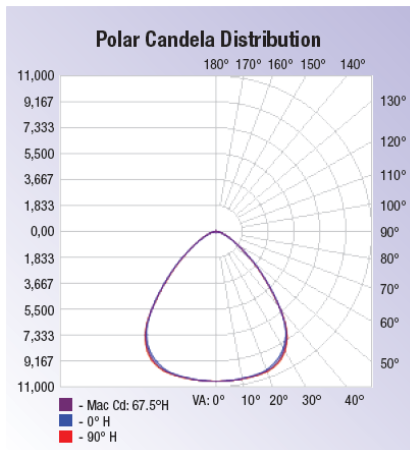

ILLUMINANCE AT A DISTANCE

	Center Beam	Beam Spread	
6 ft	294.43 fc	11.7 ft	11.7 ft
12 ft	73.61 fc	23.4 ft	23.4 ft
18 ft	32.71 fc	35.0 ft	35.1 ft
24 ft	18.40 fc	46.7 ft	46.8 ft
30 ft	11.78 fc	58.4 ft	58.4 ft
36 ft	8.18 fc	70.1 ft	70.1 ft

■ Horiz. Spread: 88.4° ■ Vert. Spread: 88.5°


ACCESSORIES



Surface Mount Bracket



Occupancy Sensor



Wire Guard



Aluminum Reflector