

Date _____

Project _____

Type _____

Location _____

UHB23

SELECTABLE LED UFO HIGH BAY LIGHT



Features	<ul style="list-style-type: none"> - Die-cast frame and driver containment housing. - Clear polycarbonate lens over LEDs provides a high light efficacy. - Heavy duty hook provided for connection to customer-supplied suspension. - CCT and wattage can easily be selected in the field
Application	Ideal for general illumination of workshop, indoor stadium, warehouse, and other industrial applications. Ideal for mounting heights of 25-40ft.
Environment	Indoor. Dry, damp, and wet locations
Material	Extruded aluminum construction with frosted acrylic lens.
Input Voltage	100-277V AC, 50/60Hz
Wattage	Wattage selectable – 150W – 200W – 240W
Lumen	145Lm / W, up to 34,800Lm
Color Temperature	3CCT selectable - 3500K - 4000K - 5000K
Dimming	0-10V Dimming
Beam Angle	90°
Power Factor	> 0.9
Surge Protection	Built-in surge protection-6KV
CRI	80
IP Rating	IP65
Dimensions	∅15.35" x H 6.38"
Cord Length	5ft
Operating Temperature	-40°C~50°C (-40°F~122°F)
Add-on Options	<ul style="list-style-type: none"> - Surface mount bracket - Motion sensor - Wire guard - Aluminum reflector
Mounting	Recessed mount in plaster or grid ceilings / surface mount with mounting kits (sold separately)
Certification	cULus Listed, DLC, IP65 rated
Warranty	5-Year limited warranty, estimated 50,000 hours useful life of LED.

ORDERING INFORMATION

Sample Number: UHB23-3W-3C-80-C

Model#	Wattage	CCT	CRI	Lens	Add-on Options (Sold Separately)
UHB23	3W	3C	80	C	
UHB23	3W Wattage Selectable (150W-200W-240W)	3C CCT Selectable (3500K-4000K-5000K)	80 CRI >80	C Clear Polycarbonate Lens	MB Surface Mount Bracket MS Motion Sensor WG Wire Guard RF Aluminum Reflector


Date _____

Project _____


Type _____

Location _____

DIMENSIONS

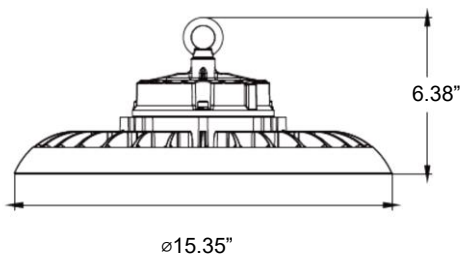

PHOTOMETRY

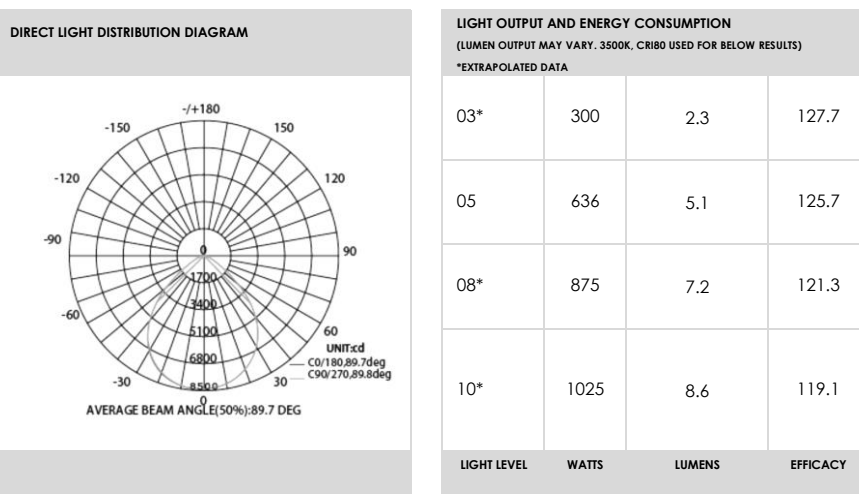


ACCESSORIES



Surface Mount Bracket



Occupancy Sensor



Wire Guard



Aluminum Reflector