

Date _____

Project _____

Type _____

Location _____

VT-WR4/WR8

SELECTABLE LED VAPORTIGHT FIXTURE



Features

- Ideally suited for use in refrigerated cold storage, industrial, parking garage, and canopy applications.
- Acceptable for outdoor and indoor installations.
- Surface mounted on ceilings or walls, or suspended via brackets, chain, or conduits.

Application

Ideal for outside walkway, parking garage, cold storage, manufacturing, and warehouse applications.

Environment

Indoor and outdoor; suitable for wet location.

Certification

cULus, cETLus, DLC

Material

Polycarbonate watertight housing with high-impact diffuser lens. No rusting, no oxidation, and no corrosion. 1/2" trade size gasketed threaded on ends.

Input Voltage

120-347V AC, 50/60Hz

Wattage

3-Wattage selectable
4FT: 32W-44W-50W
8FT: 80W-100W-120W

Dimming

0-10V Dimming

Color Temperature

3CCT selectable 3500K-4000K-5000K

Beam Angle

120°

Lumen

130Lm / W
4FT up to 6,500Lm; 8FT up to 15,600Lm

Power Factor

> 0.9

THD

< 25%

CRI

> 80

IP Rating

IP66

Operating Temperature

-40°C~50°C (-40°F~122°F)

Add-on Options

- Emergency backup battery - 90mins 10W
- Bi-level control motion sensor

Mounting

Ceiling mount / wall mount / pendant

Warranty

5-Year limited warranty, estimated 50,000 hours useful life of LED.

ORDERING INFORMATION

Sample Number: VT-WR4-3W--3C-80-F-MS

Model#	Wattage	CCT	CRI	Lens	Add-on Options (Sold Separately)
	3W	3C	80		
VT-WR4	3W Wattage Selectable (32W-44W-50W)	3C 3CCT Selectable (3500K-4000K-5000K)	80 CRI >80	F Frosted	EM 90-min Emergency Backup Battery
VT-WR8	3W Wattage Selectable (80W-100W-120W)			C Clear	MS Built-in Bi-level Control Motion Sensor



Date _____

Project _____

Type _____


Location _____

DIMENSIONS

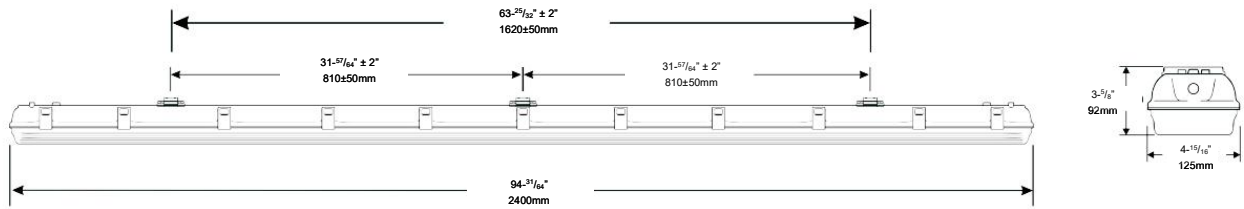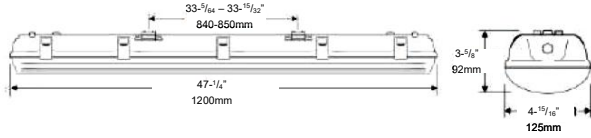

PHOTOMETRY

Cone illuminance Diagram

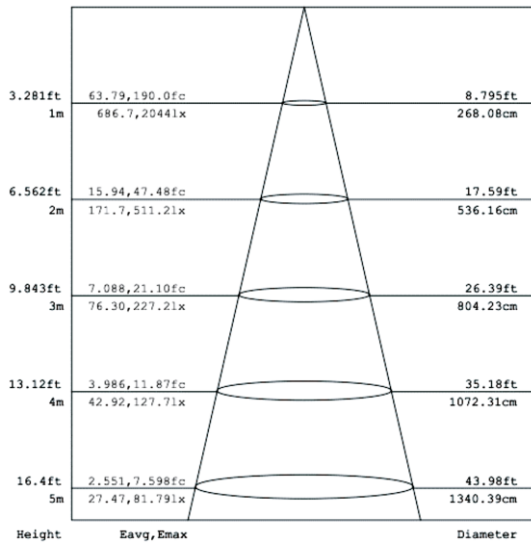

Luminous Intensity Distribution Diagram

