

WP06-150W

SELECTABLE LED WALL PACK LIGHT



Date

Project

Type

Location



Features

- CCT select luminaire that allows the installer to choose between 3000K/3500K/4000K/5000K at the time of installation.
- Three selectable lumen options.
- Die-cast aluminum housing and lens frame with heat and impact resistant borosilicate glass lens.
- LED light engine is weatherproof sealed in a luminaire rated IP65.
- Mounts to standard 3-1/2" to 4" round and octagonal or 4-inch square electrical junction boxes. Five 1/2 NPT threaded conduit access.
- Driver efficiency (>84% at full load). Available in 120-347V.

Application

Ideal for exterior illumination of commercial, retail, office, and warehouse applications.

Environment

Exterior; dry, damp and wet locations.

Material

Die-cast aluminum housing

Lens Details

Heat and impact resistant borosilicate glass lens

Finish

Bronze / White

Input Voltage

120-347V AC, 50/60Hz

Dimming

0-10V Dimming, 10% to 100%

Wattage

100W-120W-150W Selectable

Lumen

130-145 lm/W

Color Temperature

3000K-4000K-5000K Selectable

Dimensions

W 17-7/8in x D 8-7/8in x H 9-1/2 in

Weight

9.9lbs

Beam Distribution

110°

Power Factor

≥ 0.9

Surge Protection

6kV

IK Rating

IK08

CRI

> 80

IP Rating

IP65

Operating Temperature

-40°C~60°C (-40°F~140°F)

Add-on Options

- Emergency backup battery - 90mins
- Photocell
- Integrated Photocell
- PIR sensor
- Microwave Occupancy Sensor
- Wire guard
- Light Visor

Mounting

Surface mount

Certification

cULus, DLC

Warranty

5-year limited warranty on LED and driver.
Estimated 50,000 hours useful life of LED.

Date _____

Project _____

Type _____


Location _____

ORDERING INFORMATION

Sample Number: WP06M-120W-3W-3C-C-MS

Model#	Wattage	CCT	Lens Options	Emergency Options (Sold Separately)	Add-on Options (Sold Separately)
WP06M-150W	3W	3C	C		
WP06M-150W	3W 100W-120W-150W	3C 3000K-4000K-5000K	C Clear	EM90 90-min Emergency Backup Battery EM120 120-min Emergency Backup Battery	PH Photocell BP Built-in Photocell PIR PIR Sensor MS Microwave Sensor WG Wire Guard LV Light Visor

DIMENSIONS

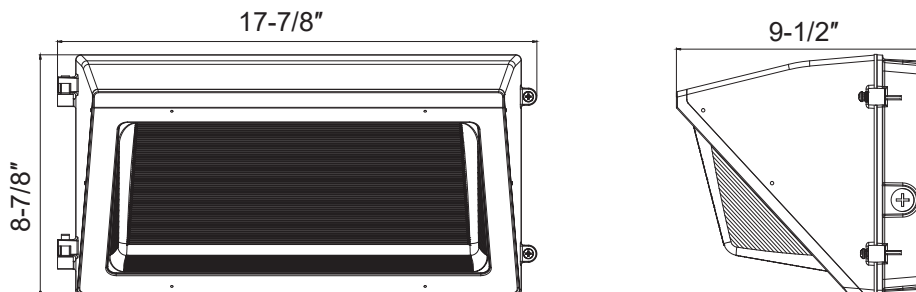

ACCESSORIES (Optional)

		
Wire Guard	Light Visor	Photocell