

## WR4-70W-3CCT

### SELECTABLE LED WRAPAROUND LIGHT



Date

Project

Type

Location



#### Features

- CCT select luminaire that allows the installer to choose between 3500K/4000K/5000K at the time of installation.
- Three selectable lumen options.
- Die-cast aluminum housing with white paint for durability.
- Frosted polycarbonate lens for even and low glare lighting.
- IP20 rating, suitable for damp locations.
- Easy installation with holes provided in housing.
- Add-on options: microwave occupancy sensor, emergency backup battery, and wire guard.

#### Application

Ideal for general illumination of commercial, retail, office, and warehouse applications.

#### Environment

Interior; dry and damp locations.

#### Material

Die-cast aluminum housing

#### Lens Details

Polycarbonate lens

#### Finish

White

#### Input Voltage

120-347V AC, 50/60Hz

#### Dimming

0-10V Dimming, 10% to 100%

#### Wattage

3Watt selectable: 40W-50W-70W

#### Lumen

135Lm/W, up to 9,450Lm

#### Color Temperature

3CCT selectable: 3500K-4000K-5000K

#### Dimensions

5-3/4in W x 2in H x 47-1/4in L

#### Weight

4FT: 1.75kgs - 3.86 lbs

#### Beam Distribution

120°

#### Power Factor

≥ 0.9

#### Surge Protection

L-N: 1kV; L-N-G: 2kV

#### CRI

> 80

#### IP Rating

IP20

#### Operating Temperature

-20°C~60°C (-4°F~140°F)

#### Add-on Options

- Emergency backup battery
- Microwave occupancy sensor
- Wire guard

#### Mounting

Surface mount

#### Certification

cULus, DLC

#### Warranty

5-year limited warranty on LED and driver.  
Estimated 50,000 hours useful life of LED.

Date \_\_\_\_\_

Project \_\_\_\_\_

Type \_\_\_\_\_


Location \_\_\_\_\_

## ORDERING INFORMATION

Sample Number: WR-4-70W-3W-3C-FR

Model#	Wattage	CCT	Lens Options	Emergency Options <small>(Sold Separately)</small>	Add-on Options <small>(Sold Separately)</small>
<b>WR-4-70W</b>	<b>3W</b>	<b>3C</b>	<b>FR</b>		
<b>WR-4-70W</b> 4FT	<b>3W</b> 3-Wattage Selectable	<b>3C</b> 3CCT Selectable	<b>FR</b> Frosted	<b>EM90</b> 90-min Emergency Backup Battery  <b>EM120</b> 120-min Emergency Backup Battery	<b>BS</b> Microwave Motion Sensor  <b>WG</b> Wire Guard

## DIMENSIONS

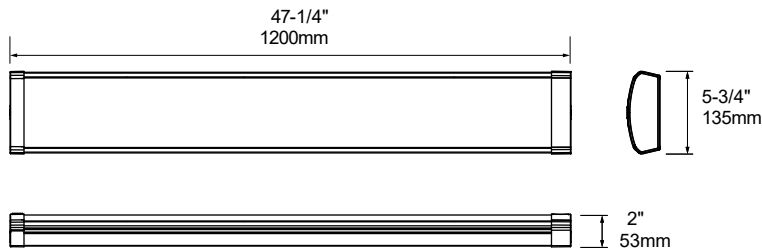

Date \_\_\_\_\_

Project \_\_\_\_\_

Type \_\_\_\_\_

Location \_\_\_\_\_

## Microwave Occupancy Sensor (Optional)

### Technical Data – Built-in Microwave Sensor

<b>Operating Voltage</b>	12V-24V DC, > 50mA
<b>Dim Control Output</b>	DIM 0-10V, max. 25mA sinking current
<b>HF System</b>	5.8GHz + 75MHz
<b>Detection Range</b>	Max. 17FT. (5.2m), 360°
<b>Mounting Height</b>	Max. 12FT (4m)
<b>Humidity</b>	Max. 95% RH
<b>Operating Temperature</b>	-40°C~70°C (-40°F~158°F)
<b>Detection Sensitivity</b>	DIP Switch: 20%/50%/75%/100% Remote control: 20%/50%/75%/100%
<b>Hold Time</b>	DIP Switch: 10s/1min/5min/15min Remote control: 5s/30s/1min/3min/5min/10min/20min/30min
<b>Daylight Threshold</b>	DIP Switch: 10Lux/30Lux/50Lux/Disable Remote control: 10Lux/30Lux/50Lux/100Lux/Disable
<b>Stand-by Period</b>	DIP Switch: 1min/30min/60min/+∞ Remote control: 1min/30min/60min/+∞
<b>Stand-by Dimming Level</b>	DIP Switch: 0%/10%/30%/50% Remote control: 10%/20%/30%/50%
<b>Default Setting</b>	Brightness 100%, hold time: 10sec, stand-by dimming level: 30%, stand-by time: 60 min, sensitivity: 100%, Daylight: 30lux

## Accessories (Optional)

		
<p><b>Microwave Sensor Remote Control</b> (sold separately)</p>	<p><b>Wire Guard for 4ft Linear Strip</b> (sold separately)</p>	<p><b>Wire Guard for 8ft Linear Strip</b> (sold separately)</p>