

WR4/8-3CCT

SELECTABLE LED WRAPAROUND LIGHT



Date

Project

Type

Location



Features	<ul style="list-style-type: none"> CCT select luminaire that allows the installer to choose between 3500K/4000K/5000K at the time of installation. Three selectable lumen options. Aluminum housing with white paint for durability. Frosted polycarbonate lens for even and low glare lighting. IP20 rating, suitable for damp locations. Easy installation with holes provided in housing. Add-on options: microwave occupancy sensor, PIR sensor, emergency backup battery.
Application	Ideal for general illumination of commercial, retail, office, and warehouse applications.
Environment	Interior; dry and damp locations.
Material	Die-cast aluminum housing
Lens Details	Polycarbonate lens
Finish	White
Input Voltage	120-347V AC, 50/60Hz
Dimming	0-10V Dimming, 10% to 100%
Wattage	4FT: 30W-40W-48W selectable 8FT: 50W-70W-90W selectable
Lumen	114Lm/W. 4FT up to 5,500Lm; 8FT up to 10,260Lm.
Color Temperature	3CCT selectable: 3500K-4000K-5000K
Dimensions	4FT: 5-3/4in W x 2in H x 47-1/4in L 8FT: 5-3/4in W x 2in H x 94-1/8in L
Weight	4FT: 1.75kgs - 3.86 lbs 8FT: 3.32kgs - 7.32lbs
Beam Distribution	120°
Power Factor	≥ 0.9
Surge Protection	L-N: 1kV; L-N-G: 2kV
CRI	> 80
IP Rating	IP20
Operating Temperature	-20°C~60°C (-4°F~140°F)
Add-on Options	<ul style="list-style-type: none"> Emergency backup battery Microwave occupancy sensor Wire guard
Mounting	Surface mount
Certification	cULus, DLC
Warranty	5-year limited warranty on LED and driver. Estimated 50,000 hours useful life of LED.

Date _____

Project _____

Type _____



Location _____

ORDERING INFORMATION

Sample Number: WR-4-3W-3C-FR

Model#	Wattage	CCT	Lens Options	Emergency Options <small>(Sold Separately)</small>	Add-on Options <small>(Sold Separately)</small>
	3W	3C	FR		
WR-4 4FT	3W 3-Wattage Selectable	3C 3CCT Selectable	FR Frosted	EM90 90-min Emergency Backup Battery	BS Microwave Motion Sensor
WR-8 8FT				EM120 120-min Emergency Backup Battery	WG Wire Guard

DIMENSIONS

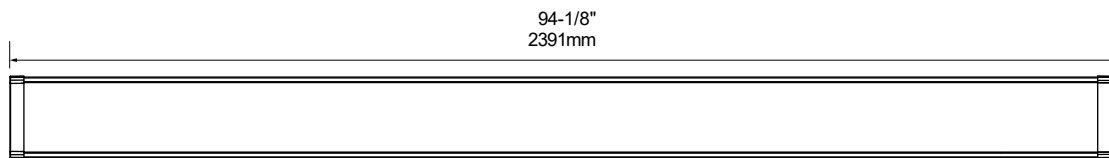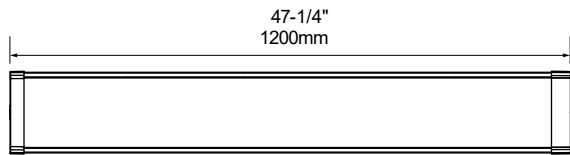

Date _____

Project _____

Type _____

Location _____

Microwave Occupancy Sensor (Optional)

Technical Data – Built-in Microwave Sensor

Operating Voltage	12V-24V DC, > 50mA
Dim Control Output	DIM 0-10V, max. 25mA sinking current
HF System	5.8GHz + 75MHz
Detection Range	Max. 17FT. (5.2m), 360°
Mounting Height	Max. 12FT (4m)
Humidity	Max. 95% RH
Operating Temperature	-40°C~70°C (-40°F~158°F)
Detection Sensitivity	DIP Switch: 20%/50%/75%/100% Remote control: 20%/50%/75%/100%
Hold Time	DIP Switch: 10s/1min/5min/15min Remote control: 5s/30s/1min/3min/5min/10min/20min/30min
Daylight Threshold	DIP Switch: 10Lux/30Lux/50Lux/Disable Remote control: 10Lux/30Lux/50Lux/100Lux/Disable
Stand-by Period	DIP Switch: 1min/30min/60min/+∞ Remote control: 1min/30min/60min/+∞
Stand-by Dimming Level	DIP Switch: 0%/10%/30%/50% Remote control: 10%/20%/30%/50%
Default Setting	Brightness 100%, hold time: 10sec, stand-by dimming level: 30%, stand-by time: 60 min, sensitivity: 100%, Daylight: 30lux

Accessories (Optional)

		
<p>Microwave Sensor Remote Control (sold separately)</p>	<p>Wire Guard for 4ft Linear Strip (sold separately)</p>	<p>Wire Guard for 8ft Linear Strip (sold separately)</p>