

## AWP01B-CCT

### ADJUSTABLE LED WALL PACK LIGHT



<b>Features</b>	<ul style="list-style-type: none"> <li>• CCT select luminaire that allows the installer to choose between 3000K/4000K/5000K at the time of installation.</li> <li>• Three selectable lumen options.</li> <li>• Die-cast aluminum housing with UV stabilized polycarbonate lens mounted with stainless steel hardware.</li> <li>• Offers a 0 to 90° tilt option. Mounts to standard 3 1/2" to 4" square and octagonal or 4 inch round electrical junction boxes, using a simple flip cover design for easy access.</li> <li>• LED light engine is weatherproof, rated IP65.</li> <li>• Integral on/off photocell</li> </ul>
<b>Application</b>	Ideal for outdoor illumination of commercial, retail, office, and warehouse applications.
<b>Environment</b>	Exterior; dry, damp, and wet locations.
<b>Material</b>	Die-cast aluminum
<b>Lens Details</b>	Polycarbonate lens
<b>Finish</b>	Bronze
<b>Input Voltage</b>	120-347V AC, 50/60Hz
<b>Dimming</b>	0-10V Dimming
<b>Wattage</b>	30W: 15W-20W-30W selectable 80W: 65W-70W-80W selectable
<b>Lumen</b>	135 Lm / W 30W up to 4,050Lm 80W up to 10,800Lm
<b>Color Temperature</b>	3CCT selectable: 3000K-4000K-5000K
<b>Dimensions</b>	30W: 7.32 x 6.5 x 4.53" (186 x 165 x 115mm) 80W: 8.98 x 7.8 x 5.51" (228 x 198 x 140mm)
<b>Weight</b>	30W - 2.99lbs (1.36kg) 80W - 4.90lbs (2.22kg)
<b>Beam Distribution</b>	90*110°
<b>Power Factor</b>	≥ 0.9
<b>Surge Protection</b>	4kV
<b>CRI</b>	> 70
<b>IP Rating</b>	IP65
<b>Operating Temperature</b>	-40°C~50°C (-40°F~122°F)
<b>Mounting</b>	Wall mount
<b>Certification</b>	cULus, DLC
<b>Warranty</b>	5-year limited warranty on LED and driver. Estimated 50,000 hours useful life of LED.

Date \_\_\_\_\_

Project \_\_\_\_\_

Type \_\_\_\_\_


Location \_\_\_\_\_

## ORDERING INFORMATION


Sample Number: AWP01B-30W-3C-SF

Model#	Wattage	CCT	Lens Options
AWP01B		3C	SF
AWP01B	<b>30W</b> 15W-20W-30W Selectable	3C 3CCT Selectable	SF Semi-Frosted
	<b>80W</b> 65W-70W-80W Selectable		

## DIMENSIONS

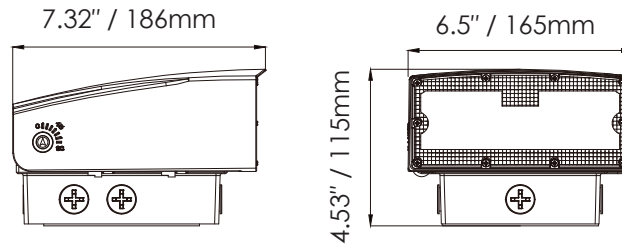

30W

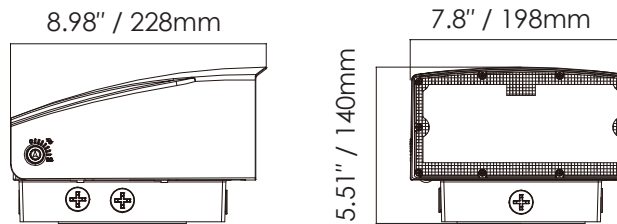

80W

## LED Wattage and Lumen Values

Model #	Wattage	3000K	4000K	5000K
AWP01B-30W	30W	3600 Lm	4050 Lm	3750 Lm
	20W	2400 Lm	2700 Lm	2500 Lm
	15W	1800 Lm	2025 Lm	1875 Lm
AWP01B-80W	80W	9600 Lm	10800 Lm	10000 Lm
	70W	8400 Lm	9450 Lm	8750 Lm
	65W	7800 Lm	8775 Lm	8125 Lm