

MX30W-CCT

ADJUSTABLE LED WALL PACK LIGHT



Date

Project

Type

Location



Features

- CCT select luminaire that allows the installer to choose between 3000K/4000K/5000K at the time of installation.
- Three selectable lumen options.
- Die-cast aluminum housing with UV stabilized polycarbonate lens mounted with stainless steel hardware.
- Offers a 0 to 90° tilt option. Mounts to standard 3 1/2" to 4" square and octagonal or 4 inch round electrical junction boxes, using a simple flip cover design for easy access.
- LED light engine is weatherproof, rated IP65.

Application

Ideal for outdoor illumination of commercial, retail, office, and warehouse applications.

Environment

Exterior; dry, damp, and wet locations.

Material

Die-cast aluminum

Lens Details

Polycarbonate lens

Finish

Bronze

Input Voltage

120-277V AC, 50/60Hz

Dimming

0-10V Dimming

Wattage

30W: 15W-20W-30W selectable

Lumen

180 Lm / W
30W up to 5,400Lm

Color Temperature

3CCT selectable: 3000K-4000K-5000K

Dimensions

W 6-1/2" x H 8-1/16" x D 3-7/8"
(165.15 x 205.25 x 97.63mm)

Weight

2.87lbs (1.3kg)

Beam Distribution

90°x110°

Power Factor

≥ 0.9

Surge Protection

4kV

CRI

> 70

IP Rating

IP65

Operating Temperature

-40°C~50°C (-40°F~122°F)

Mounting

Wall mount

Certification

cULus, DLC

Warranty

5-year limited warranty on LED and driver.
Estimated 50,000 hours useful life of LED.

Date _____

Project _____

Type _____



Location _____

ORDERING INFORMATION

Sample Number: MX30W-3W-3C-SF

Model#	Wattage	CCT	Lens Options
MX30W	3W	3C	SF
MX30W	3W 15W-20W-30W Selectable	3C 3CCT Selectable	SF Semi-Frosted

DIMENSIONS

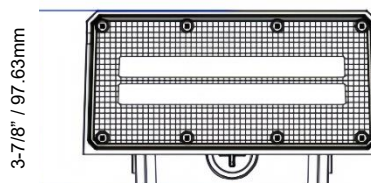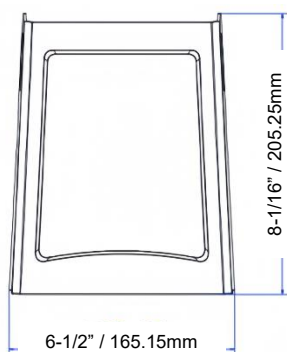

LED Wattage and Lumen Values

Model #	Wattage	3000K	4000K	5000K
WPMX-30W	30W	5050 Lm	5400 Lm	5250 Lm
	20W	3260 Lm	3600 Lm	3380 Lm
	15W	2300 Lm	2700 Lm	2550 Lm