

LTR-8

LTR 2-WIRE TRACK

2-Wire Track System | Interior | Dry and Damp Location



Date	
Project	
Type	
Location	



FINISH

-  White
-  Black
-  Silver

ORDERING INFORMATION

Sample Number: LTR-8-WH


LTR-8	
-------	--

Product #	Finish
LTR-8	WH White
	BK Black
	SV Silver







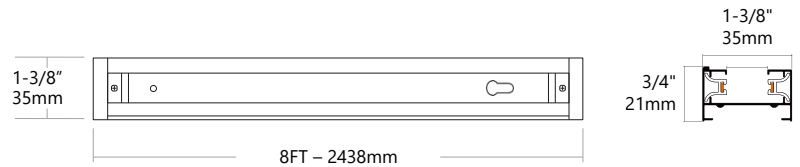


SPECIFICATIONS

Environment	Interior. For dry and damp locations.
Material	Extruded aluminum construction Extruded PVC insulated solid 12-gauge copper line conductor
Trim Finish	White/ Black / Silver
Input Voltage	120V, 60Hz, 20A Max.
Dimensions	1-3/8" x 3/4" x 96" (Field-cutttable to length) 35mm x 21mm x 2438mm
Mounting	Surface mount (mounting hardware included)
Warranty	1 year
Operating Temperature	-20° to 50°C
Certification	cETLus

DIMENSIONS



ACCESSORIES (SOLD SEPARATELY)

-  **LTR-C**
Live-end. Provides power from end of Track.
-  **LTR-CB**
Live-end conduit feed for top or end feed
-  **LTR-M**
Center feed. Provides power anywhere along track from junction box. Includes canopy cover.
-  **LTR-I**
I-connector. Connects two track sections at 180°.
-  **LTR-L**
L-connector. Connects two track sections at 90°.
-  **LTR-T**
T-connector. Connects three track sections at 90°.
-  **LTR-X**
X-connector. Connects four track sections at 90°.
-  **LTR-F**
Flexible connector. Connects two track sections at varying angles.
-  **LTR-N**
End cap for track.