

HPK8 LED MODULES

LED Modules

Date	
Project	
Type	
Location	



DIMMABLE



WET
LOCATION

COLOR TEMPERATURE

- 3000K
- 10000K
- RGB


FEATURES

- Ideal for concealed lighting, back-lighting for signage letters, channel letter lighting, etc.
- Powered by Philips chip LED.
- 1W per module, 160-170Lm/W. Low power consumption but high lumen output.
- Dimmable.
- Protection class up to IP68.
- Suitable for both indoor and outdoor use.

SPECIFICATIONS

Input Voltage	12VDC
Wattage	1W / Module
LED Quantity / Module	3pcs
Luminous Flux	160-170Lm
Beam Angle	170°
Color Temperature	3000K / 10000K / RGB
Dimension	68mm x 15mm x 11mm
IP Rating	IP68
Operating Temperature	-20°C to +60°C
Lamp Life	Estimated 50,000 hours useful life of LED
Certification	cULus

DIMENSIONS

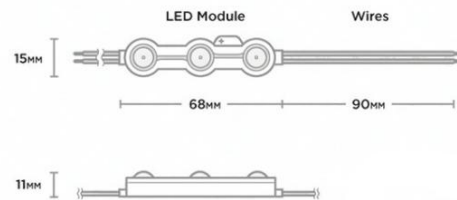

PHOTOMETRIC

