

CKPD LED CYLINDER DOWNLIGHT

Surface Mount Downlight | Interior and Exterior | Dry and Damp Location



Date	
Project	
Type	
Location	

ORDERING INFORMATION

Sample Number: CKPD-25W-5C-3-90-BK-BK-SM

CKPD		5C					
Product #	Wattage	CCT	Beam Angle	CRI	Finish	Reflector Color	Diffuser
CKPD	15W	5C 5CCT	1 15°	90 CRI> 90	BK Black	BK Black	FR Frosted
	25W		2 24°	97 CRI> 97	WH White	WH White	SM Semi-Frosted
	30W		3 38°		SN Satin Nickel	SN Satin Nickel	CL Clear
	40W		4 60°			GD Gold	
			4 80°				

SPECIFICATIONS

Environment	Interior and exterior. For dry and damp locations.
Material	Die-cast aluminum
Trim Finish	Black / White / Satin Nickel
Color Temperature	5CCT Selectable - 2700K-3000K-3500K-4000K-5000K
Beam Angle	15° / 24° / 38° / 60° / 80°
Input Voltage	120V, 60Hz
Wattage	15W / 25W / 30W / 40W
Lumen	110lm/W
CRI	90 / 97
IP Rating	54
Mounting	Mount into 4in Octagonal Box
Warranty	5 years limited warranty Estimated 50,000 hours useful life of LED

REFLECTOR OPTIONS



White



Black




Satin
Nickel



Gold

DIMENSIONS

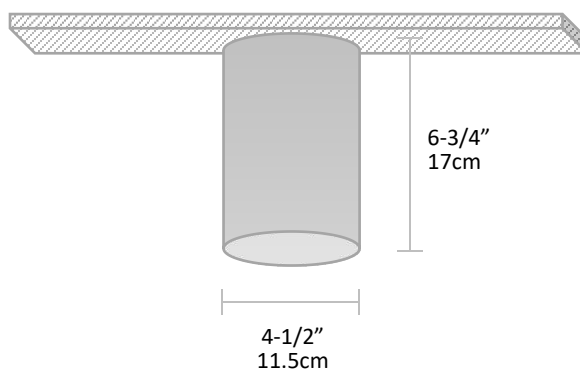

FINISH



COLOR TEMPERATURE



BEAM ANGLE

