

SELECTABLE LED BOLLARD LIGHT

weiss
LIGHTING

Stylish. Durable. Efficient.

Versatile lighting solutions for
pathways, landscapes, and
architectural spaces.



BL02B



BL02C



BL02A

3 MODELS. ONE SMART SOLUTION.



3CCT SELECTABLE
3000K / 4000K / 5000K



3-WATTAGE SELECTABLE
20W / 25W / 35W



BUILT TO LAST
IK08 Impact Rating
6kV Surge Protection



**IP65
RATED**



**0-10V
DIMMING**



**cULus
LISTED**



**DLC
LISTED**



**50,000
HOURS
LIFESPAN**



**EASY
INSTALLATION**
Anchor bolts
included

BL02A

weiss
LIGHTING

SELECTABLE LED BOLLARD LIGHT

Stylish. Durable. Efficient.

Versatile lighting solutions for pathways, landscapes, and architectural spaces.



3CCT SELECTABLE

3000K / 4000K / 5000K

Choose the perfect color temperature on site.



3-WATTAGE SELECTABLE

20W / 25W / 35W

Adjust lumen output to suit any application.



BUILT TO LAST

**IK08 Impact Rating
6kV Surge Protection**

Designed for durability and long-last performance.



**IP65
RATED**

For wet locations



**0-10V
DIMMING**

5% to 100%



**50,000
HOURS
LIFESPAN**



**EASY
INSTALLATION**

Anchor bolts included



Pathway Lighting. Elevated.

Engineered to Perform.

BL02A

SELECTABLE LED BOLLARD LIGHT



Date

Project

Type

Location



Features

- CCT select luminaire that allows the Installer to choose between 3000K/4000K/5000K at the time of installation.
- Lumen adjustable bollard with options for 3,950 lumens at 35W, 2,820 lumens at 25W, or 2,255 lumens at 20W.
- Robust construction with extruded aluminum shaft, die-cast aluminum head and base.
- Corrosion resistant powder coating.
- Anchor bolts and template included.
- IK08 rated to withstand mechanical impact.
- 6kV surge protection.

Application

Ideal for pathway lighting in commercial and residential applications such as condos, townhouses, office buildings, university campuses, shopping malls, and more.

Environment

Exterior; dry, damp, and wet locations.

Material

Die-cast aluminum

Lens Details

Clear polycarbonate

Finish

White / Black / Silver / Bronze

Diffuser Type

Clear PC

Input Voltage

120-277V AC, 50/60Hz

Dimming

0-10V Dimming, 5% to 100%

Wattage

3-Wattage selectable: 20W-25W-35W

Lumen

3000K - 108Lm / W
4000K - 115Lm / W
5000K - 112Lm / W

Color Temperature

3CCT selectable: 3000K-4000K-5000K

Height

41 in

Diameter

6-1/4 in

Weight

15.2lbs

Beam Distribution

130°

Power Factor

≥ 0.9

THD

≤ 20%

Surge Protection

6kV

CRI

> 80

IP Rating

IP65

Operating Temperature

-40°C~45°C (-40°F~113°F)

Add-on Options

- Emergency backup battery - 90mins 10W
- Built-in ON/OFF photocell

Mounting

Surface mount, anchor bolts and template included.


Certification

cULus, DLC

Warranty

3-year limited warranty on LED and driver.
Estimated 50,000 hours useful life of LED.

ACCESSORIES





Anchor bolt kit included

ORDERING INFORMATION

Sample Number: BL02A-3W-3C-20-BK

Model#	Wattage	CCT	Height	Finish	Add-on Options (Sold Separately)
BL02A	3W	3C			
BL02A	3W 20W-25W-35W Selectable	3C 3000K-4000K-5000K Selectable	41 ** 41in **in - Specify length	WH White BK Black SV Silver BR Bronze	EM Emergency Backup Battery PH Built-in ON/OFF photocell


DIMENSIONS

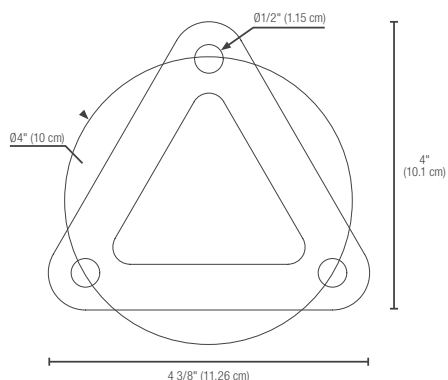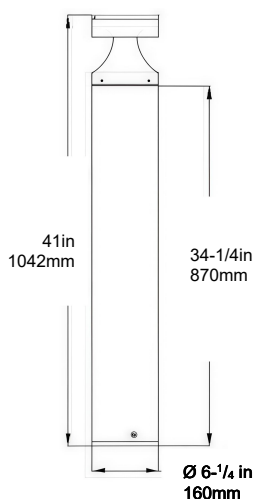

ANCHOR BOLT DRILLING PATTERN

PHOTOMETRY

Luminous Intensity Distribution Curve

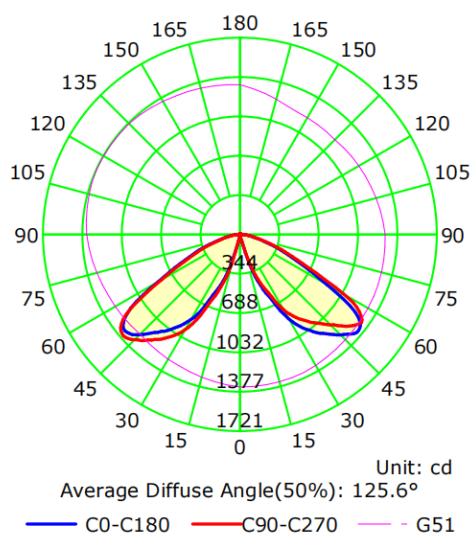

The Average Illuminance Effective Figure

Height	Avg./Nadir. E	Beam Angle: 125.5°	Diameter / Area
1.0m	264.75/ 1.65lx		3.88m / 11.83sq.m
2.0m	66.19/ 0.41lx		7.76m / 47.34sq.m
3.0m	29.42/ 0.18lx		11.65m / 106.51sq.m
4.0m	16.55/ 0.10lx		15.53m / 189.35sq.m
5.0m	10.59/ 0.07lx		19.41m / 295.86sq.m
6.0m	7.35/ 0.05lx		23.29m / 426.03sq.m
7.0m	5.40/ 0.03lx		27.17m / 579.88sq.m
8.0m	4.14/ 0.03lx		31.05m / 757.39sq.m
9.0m	3.27/ 0.02lx		34.94m / 958.57sq.m
10.0m	2.65/ 0.02lx		38.82m / 1183.43sq.m

BL02B

weiss
LIGHTING

SELECTABLE LED BOLLARD LIGHT

Stylish. Durable. Efficient.

Versatile lighting solutions for pathways, landscapes, and architectural spaces.



3CCT SELECTABLE

3000K / 4000K / 5000K

Choose the perfect color temperature on site.



3-WATTAGE SELECTABLE

20W / 25W / 35W

Adjust lumen output to suit any application.



BUILT TO LAST

**IK08 Impact Rating
6kV Surge Protection**

Designed for durability and long-last performance.



**IP65
RATED**

For wet locations



**0-10V
DIMMING**

5% to 100%



**50,000
HOURS
LIFESPAN**



**EASY
INSTALLATION**

Anchor bolts included



Pathway Lighting. Elevated.

Engineered to Perform.

BL02B

SELECTABLE LED BOLLARD LIGHT



Date

Project

Type

Location



Features

- CCT select luminaire that allows the Installer to choose between 3000K/4000K/5000K at the time of installation.
- Lumen adjustable bollard with options for 5,000 lumens at 35W, 3,570 lumens at 25W, or 2,855 lumens at 20W.
- Robust construction with extruded aluminum shaft, die-cast aluminum head and base.
- Corrosion resistant powder coating.
- Polycarbonate lens with UV inhibitors to prevent yellowing from the sun.
- Anchor bolts and template included.
- IK08 rated to withstand mechanical impact.
- 6kV surge protection.

Application

Ideal for pathway lighting in commercial and residential applications such as condos, townhouses, office buildings, university campuses, shopping malls, and more.

Environment

Exterior; dry, damp, and wet locations.

Material

Die-cast aluminum

Lens Details

Clear polycarbonate

Finish

White / Black / Silver / Bronze

Diffuser Type

Clear PC

Input Voltage

120-277V AC, 50/60Hz

Dimming

0-10V Dimming, 5% to 100%

Wattage

3-Wattage selectable: 20W-25W-35W

Lumen

3000K - 130Lm / W
4000K - 143Lm / W
5000K - 139Lm / W

Color Temperature

3CCT selectable: 3000K-4000K-5000K

Height

41 in

Diameter

6-1/4 in

Weight

15.2lbs

Beam Distribution

160°

Power Factor

≥ 0.9

THD

≤ 20%

Surge Protection

6kV

CRI

> 80

IP Rating

IP65

Operating Temperature

-40°C~45°C (-40°F~113°F)

Add-on Options

- Emergency backup battery - 90mins 10W
- Built-in ON/OFF photocell

Mounting

Surface mount, anchor bolts and template included.


Certification

cULus, DLC

Warranty

3-year limited warranty on LED and driver.
Estimated 50,000 hours useful life of LED.

ACCESSORIES



Anchor bolt kit included

Date

Project

Type



Location

ORDERING INFORMATION

Sample Number: BL02B-3W-3C-20-BK


Model#	Wattage	CCT	Height	Finish	Add-on Options (Sold Separately)
BL02B	3W	3C			
BL02B	3W 20W-25W-35W Selectable	3C 3000K-4000K-5000K Selectable	41 ** 41in **in - Specify length	WH White BK Black SV Silver BR Bronze	EM Emergency Backup Battery PH Built-in ON/OFF photocell

DIMENSIONS

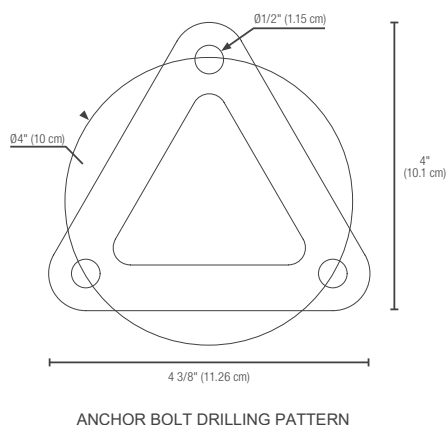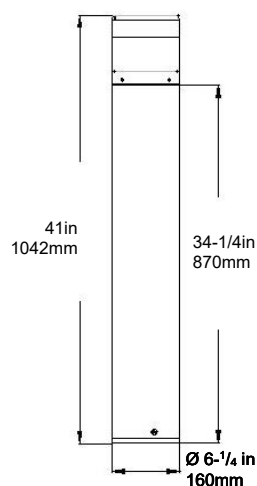


PHOTOMETRY

Luminous Intensity Distribution Curve

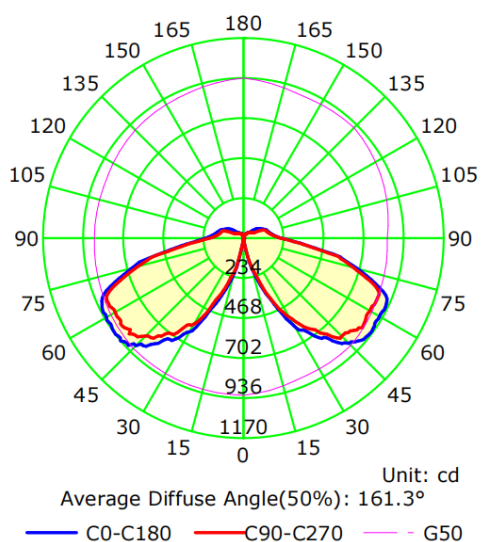

The Average Illuminance Effective Figure

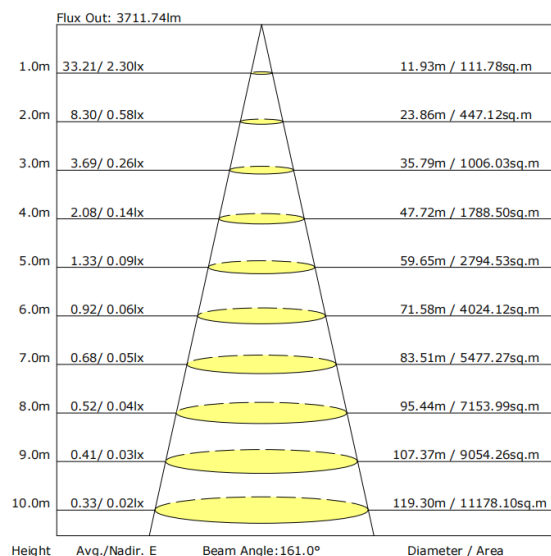

BL02C

weiss
LIGHTING

SELECTABLE LED BOLLARD LIGHT

Stylish. Durable. Efficient.

Versatile lighting solutions for pathways, landscapes, and architectural spaces.



3CCT SELECTABLE

3000K / 4000K / 5000K

Choose the perfect color temperature on site.



3-WATTAGE SELECTABLE

20W / 25W / 35W

Adjust lumen output to suit any application.



BUILT TO LAST

**IK08 Impact Rating
6kV Surge Protection**

Designed for durability and long-last performance.



**IP65
RATED**

For wet locations



**0-10V
DIMMING**

5% to 100%



**50,000
HOURS
LIFESPAN**



**EASY
INSTALLATION**

Anchor bolts included



Pathway Lighting. Elevated.

Engineered to Perform.

BL02C

SELECTABLE LED BOLLARD LIGHT



Date

Project

Type

Location



Features

- CCT select luminaire that allows the Installer to choose between 3000K/4000K/5000K at the time of installation.
- Lumen adjustable bollard with options for 1050 lumens at 35W, 750 lumens at 25W, or 600 lumens at 20W.
- Robust construction with extruded aluminum shaft, die-cast aluminum head and base.
- Corrosion resistant powder coating.
- Polycarbonate lens with UV inhibitors to prevent yellowing from the sun.
- Anchor bolts and template included.
- IK08 rated to withstand mechanical impact.
- 6kV surge protection.

Application

Ideal for pathway lighting in commercial and residential applications such as condos, townhouses, office buildings, university campuses, shopping malls, and more.

Environment

Exterior; dry, damp, and wet locations.

Material

Die-cast aluminum

Lens Details

Clear polycarbonate

Finish

White / Black / Silver / Bronze

Diffuser Type

Louvered

Input Voltage

120-277V AC, 50/60Hz

Dimming

0-10V Dimming, 5% to 100%

Wattage

3-Wattage selectable: 20W-25W-35W

Lumen

30Lm / W

20W - 600Lm

25W - 750Lm

35W - 1050Lm

Color Temperature

3CCT selectable: 3000K-4000K-5000K

Height

43-5/16 in

Diameter

6-1/4 in

Weight

16.7lbs

Beam Distribution

150°

Power Factor

≥ 0.9

THD

≤ 20%

Surge Protection

6kV

CRI

> 80

IP Rating

IP65

Operating Temperature

-40°C~45°C (-40°F~113°F)

Add-on Options

- Emergency backup battery - 90mins 10W
- Built-in ON/OFF photocell

Mounting

Surface mount, anchor bolts and template included.


Certification

cULus, DLC

Warranty

3-year limited warranty on LED and driver.
Estimated 50,000 hours useful life of LED.

ACCESSORIES



Anchor bolt kit included

Date

Project

Type


Location

ORDERING INFORMATION


Sample Number: BL02C-3W-3C-20-FL

Model#	Wattage	CCT	Height	Finish	Add-on Options (Sold Separately)
BL02C	3W	3C			
BL02C	3W 20W-25W-35W Selectable	3C 3000K-4000K-5000K Selectable	43 ** 43.3in **in - Specify length	WH White BK Black SV Silver BR Bronze	EM Emergency Backup Battery PH Built-in ON/OFF photocell

DIMENSIONS

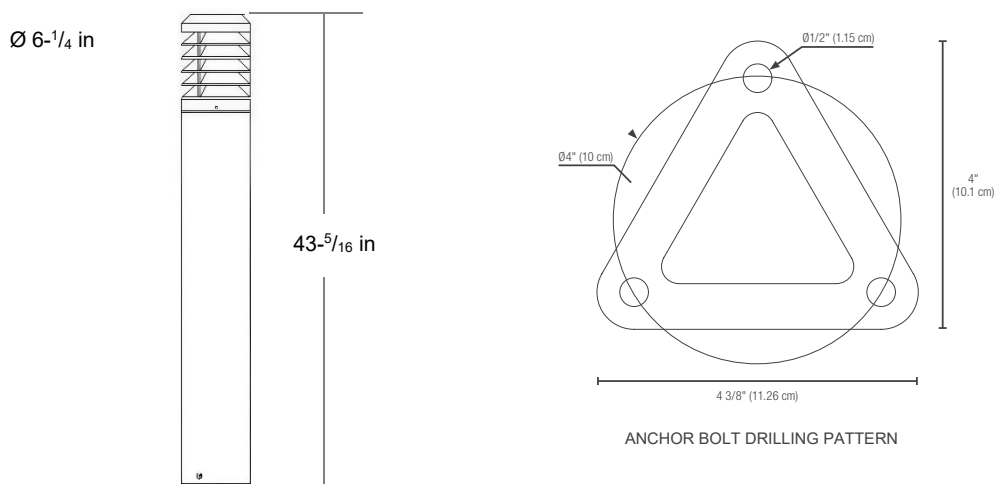

PHOTOMETRY

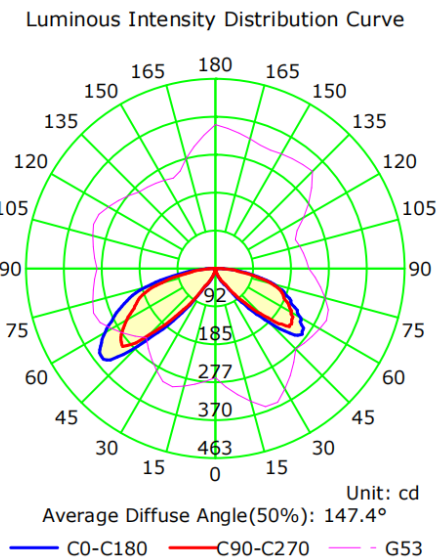

The Average Illuminance Effective Figure

Flux Out: 781.45lm

Height	Avg./Nadir. E	Beam Angle: 146.4°	Diameter / Area
1.0m	22.65/ 0.36lx		6.63m / 34.51sq.m
2.0m	5.66/ 0.09lx		13.26m / 138.03sq.m
3.0m	2.52/ 0.04lx		19.89m / 310.56sq.m
4.0m	1.42/ 0.02lx		26.51m / 552.10sq.m
5.0m	0.91/ 0.01lx		33.14m / 862.66sq.m
6.0m	0.63/ 0.01lx		39.77m / 1242.23sq.m
7.0m	0.46/ 0.01lx		46.40m / 1690.81sq.m
8.0m	0.35/ 0.01lx		53.03m / 2208.41sq.m
9.0m	0.28/ 0.00lx		59.66m / 2795.02sq.m
10.0m	0.23/ 0.00lx		66.28m / 3450.64sq.m