

BL02B

SELECTABLE LED BOLLARD LIGHT



Date

Project

Type

Location



Features

- CCT select luminaire that allows the Installer to choose between 3000K/4000K/5000K at the time of installation.
- Lumen adjustable bollard with options for 5,000 lumens at 35W, 3,570 lumens at 25W, or 2,855 lumens at 20W.
- Robust construction with extruded aluminum shaft, die-cast aluminum head and base.
- Corrosion resistant powder coating.
- Polycarbonate lens with UV inhibitors to prevent yellowing from the sun.
- Anchor bolts and template included.
- IK08 rated to withstand mechanical impact.
- 6kV surge protection.

Application

Ideal for pathway lighting in commercial and residential applications such as condos, townhouses, office buildings, university campuses, shopping malls, and more.

Environment

Exterior; dry, damp, and wet locations.

Material

Die-cast aluminum

Lens Details

Clear polycarbonate

Finish

White / Black / Silver / Bronze

Diffuser Type

Clear PC

Input Voltage

120-277V AC, 50/60Hz

Dimming

0-10V Dimming, 5% to 100%

Wattage

3-Wattage selectable: 20W-25W-35W

Lumen

3000K - 130Lm / W
4000K - 143Lm / W
5000K - 139Lm / W

Color Temperature

3CCT selectable: 3000K-4000K-5000K

Height

41 in

Diameter

6-1/4 in

Weight

15.2lbs

Beam Distribution

160°

Power Factor

≥ 0.9

THD

≤ 20%

Surge Protection

6kV

CRI

> 80

IP Rating

IP65

Operating Temperature

-40°C~45°C (-40°F~113°F)

Add-on Options

- Emergency backup battery - 90mins 10W
- Built-in ON/OFF photocell

Mounting

Surface mount, anchor bolts and template included.


Certification

cULus, DLC

Warranty

3-year limited warranty on LED and driver.
Estimated 50,000 hours useful life of LED.

ACCESSORIES



Anchor bolt kit included

Date

Project

Type



Location

ORDERING INFORMATION

Sample Number: BL02B-3W-3C-20-BK


Model#	Wattage	CCT	Height	Finish	Add-on Options (Sold Separately)
BL02B	3W	3C			
BL02B	3W 20W-25W-35W Selectable	3C 3000K-4000K-5000K Selectable	41 ** 41in **in - Specify length	WH White BK Black SV Silver BR Bronze	EM Emergency Backup Battery PH Built-in ON/OFF photocell

DIMENSIONS

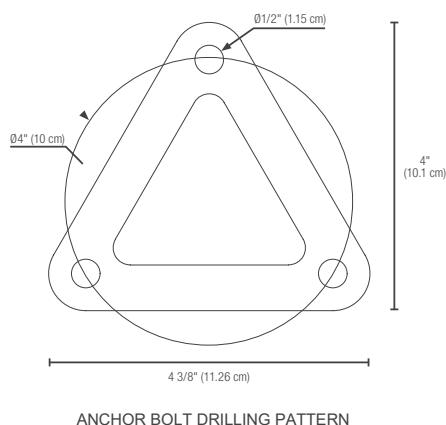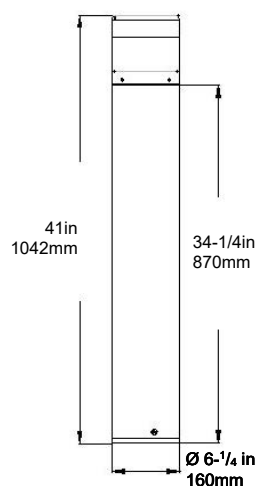

PHOTOMETRY

Luminous Intensity Distribution Curve

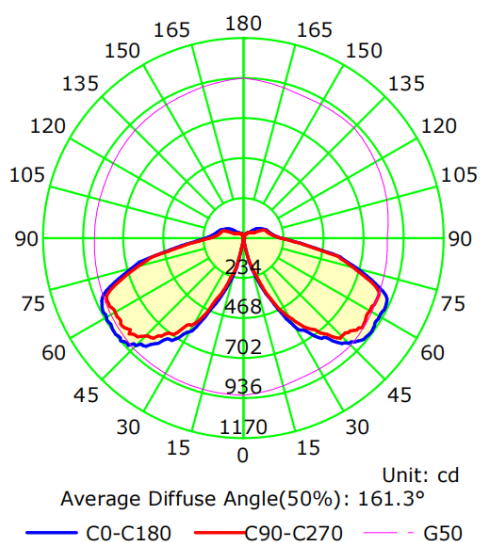

The Average Illuminance Effective Figure

