

Date

Project

Type

Location

BL02C

SELECTABLE LED BOLLARD LIGHT



Features

- CCT select luminaire that allows the Installer to choose between 3000K/4000K/5000K at the time of installation.
- Lumen adjustable bollard with options for 1050 lumens at 35W, 750 lumens at 25W, or 600 lumens at 20W.
- Robust construction with extruded aluminum shaft, die-cast aluminum head and base.
- Corrosion resistant powder coating.
- Polycarbonate lens with UV inhibitors to prevent yellowing from the sun.
- Anchor bolts and template included.
- IK08 rated to withstand mechanical impact.
- 6kV surge protection.

Application

Ideal for pathway lighting in commercial and residential applications such as condos, townhouses, office buildings, university campuses, shopping malls, and more.

Environment

Exterior; dry, damp, and wet locations.

Material

Die-cast aluminum

Lens Details

Clear polycarbonate

Finish

White / Black / Silver / Bronze

Diffuser Type

Louvered

Input Voltage

120-277V AC, 50/60Hz

Dimming

0-10V Dimming, 5% to 100%

Wattage

3-Wattage selectable: 20W-25W-35W

Lumen

30Lm / W
20W - 600Lm
25W - 750Lm
35W - 1050Lm

Color Temperature

3CCT selectable: 3000K-4000K-5000K

Height

43-5/16 in

Diameter

6-1/4 in

Weight

16.7lbs

Beam Distribution

150°

Power Factor

≥ 0.9

THD

≤ 20%

Surge Protection

6kV

CRI

> 80

IP Rating

IP65

Operating Temperature

-40°C~45°C (-40°F~113°F)

Add-on Options

- Emergency backup battery - 90mins 10W
- Built-in ON/OFF photocell

Mounting

Surface mount, anchor bolts and template included.


Certification

cULus, DLC

Warranty

3-year limited warranty on LED and driver.
Estimated 50,000 hours useful life of LED.

ACCESSORIES



Anchor bolt kit included

Date

Project

Type


Location

ORDERING INFORMATION


Sample Number: BL02C-3W-3C-20-FL

Model#	Wattage	CCT	Height	Finish	Add-on Options (Sold Separately)
BL02C	3W	3C			
BL02C	3W 20W-25W-35W Selectable	3C 3000K-4000K-5000K Selectable	43 ** 43.3in **in - Specify length	WH White BK Black SV Silver BR Bronze	EM Emergency Backup Battery PH Built-in ON/OFF photocell

DIMENSIONS

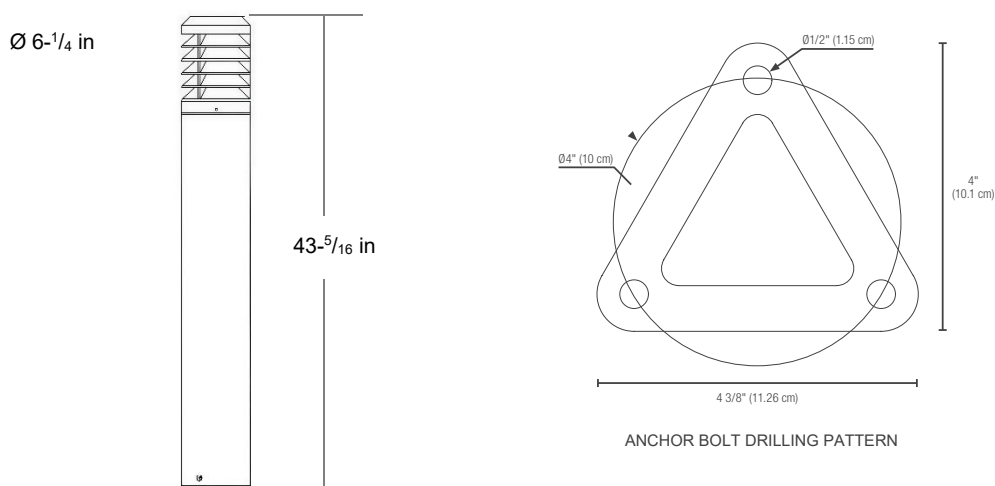

PHOTOMETRY

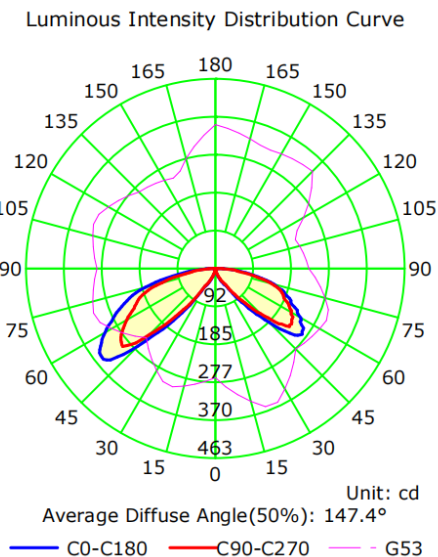

The Average Illuminance Effective Figure

Flux Out: 781.45lm

Height	Avg./Nadir. E	Beam Angle: 146.4°	Diameter / Area
1.0m	22.65/ 0.36lx		6.63m / 34.51sq.m
2.0m	5.66/ 0.09lx		13.26m / 138.03sq.m
3.0m	2.52/ 0.04lx		19.89m / 310.56sq.m
4.0m	1.42/ 0.02lx		26.51m / 552.10sq.m
5.0m	0.91/ 0.01lx		33.14m / 862.66sq.m
6.0m	0.63/ 0.01lx		39.77m / 1242.23sq.m
7.0m	0.46/ 0.01lx		46.40m / 1690.81sq.m
8.0m	0.35/ 0.01lx		53.03m / 2208.41sq.m
9.0m	0.28/ 0.00lx		59.66m / 2795.02sq.m
10.0m	0.23/ 0.00lx		66.28m / 3450.64sq.m